NXT LITE

LIGHT TRESPASS SHIELD INSTALLATION INSTRUCTIONS

⚠ WARNING – RISK OF SHOCK – DISCONNECT POWER BEFORE SERVICING ⚠

IMPORTANT: READ CAREFULLY BEFORE INSTALLING NXT-LITE LIGHT SHIELD

SAFETY: ALL WORK SHOULD BE PERFORMED BY A QUALIFIED SERVICE PERSON. Proper grounding is required to ensure personal safety.

Light Trespass Shield NXT-LITE-I
Part Number LRL-MTL0246-LF

Applies to all NXT-LITE-I shield installations (FSS, HSS, and glass optics).

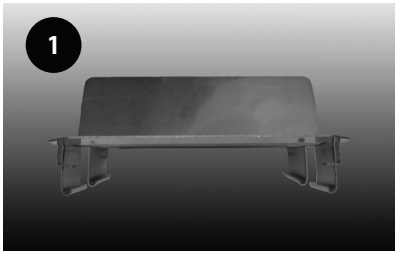

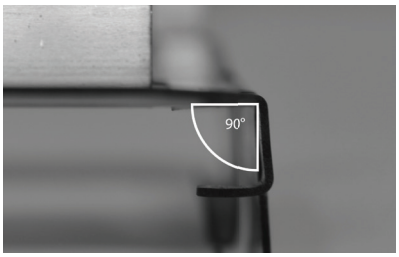

Before installation, inspect the light shield for any damage or deformation. The side clips should be positioned at a 90° angle from the shield frame.

Acrylic Optics:
If the luminiaire has standard acrylic (non-glass) optics leave the tabs in their original position. See 2A.

Glass Optics:
If the luminaire has glass-covered optics, bend the small metal tabs outward past the larger clips. The NXT-LITE-I shield has four tabs. See 2B.

House Side Shielding (HSS):
To block back light, position the shield so that the fins are angled toward the nose of the luminaire, ensuring that the back edge of the shield is over the plastic bracket around the LED lens. See 3A.

Front Side Shielding (FSS):
To block forward light, position the shield so that the fins are angled toward the pole end of the luminaire, ensuring that the front edge of the shield is over the plastic bracket around the LED lens. See 3B.

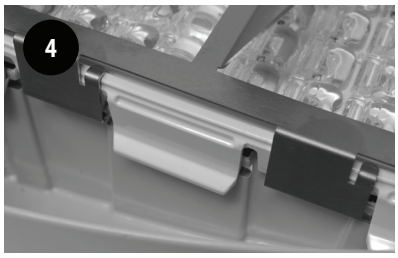

Press the shield onto the LED bracket until the side clips latch into place. Press the clips from the sides to ensure a secure fit.

All information provided is subject to change without notice. Copyright © 2026 LED ROADWAY LIGHTING LTD. All rights reserved.

LED ROADWAY LIGHTING

84 Chain Lake Drive, Halifax,
Nova Scotia, Canada, B3S 1A2

T: +1.877.533.5755
F: +1.888.533.5755

ledroadwaylighting.com
info@ledroadwaylighting.com